




Series: 51302 Type: PP

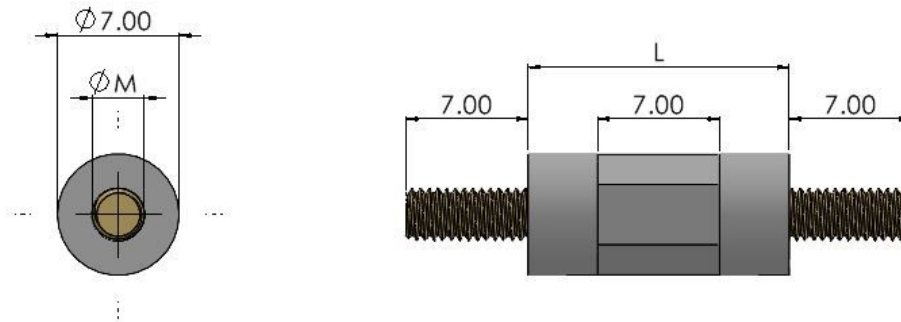

Round Polystyrene Pillars M/M

| Part No. | Thread M | Body A/F | Body O/D | Length L | Length 2 | Length 3 | Length 4 |
|----------|----------|----------|----------|----------|----------|----------|----------|
| 3070 15 | M3 | 6 | 7.0 | 15 | 7 | 7 | 7 |
| 3070 20 | M3 | 6 | 7.0 | 20 | 7 | 7 | 7 |
| 3070 25 | M3 | 6 | 7.0 | 25 | 7 | 7 | 7 |
| 3070 30 | M3 | 6 | 7.0 | 30 | 7 | 7 | 7 |
| 3070 40 | M3 | 6 | 7.0 | 40 | 7 | 7 | 7 |
| 3070 55 | M3 | 6 | 7.0 | 55 | 7 | 7 | 7 |

Male/Male Polystyrene pillars are heat and high impact resistant insulating pillars with steel studs zinc plated as thread forms. They are round bodied with a central hexagon spanner location to assist tightening. The Electrical properties are as follows: -

Dissipation factor...IEC 250 4.10 - 4

Insulation resistance...10 - 13 m.ohm

Dielectric constant...IEC 250 2.5

Dielectric strength...DIN 53481 150Kv/mm

Max. Service temp...70°C. Material & Colour:-Polystyrene/Brass Grey To Specify Use:
 Series No / Part No (eg 51302 3070 30)

All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples