




Series: 40107 Type: J NUT

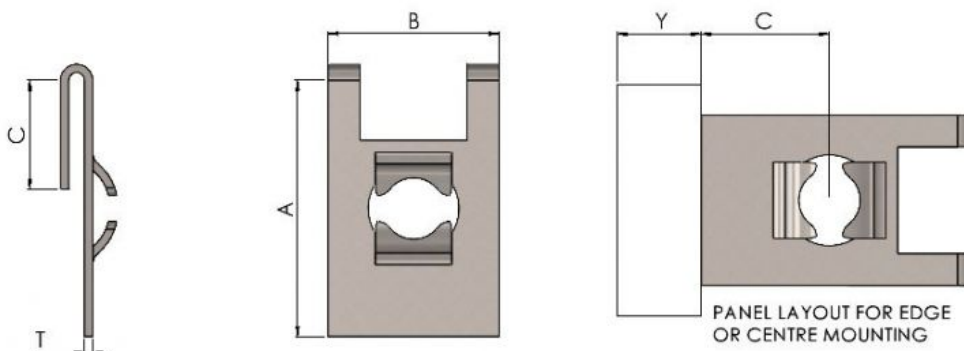

## J Nuts

Part No.	Screw Gauge	Panel Range	Length A	Width B	Hole Centre C	Hole Diam	Thickness T	Cut out Size Y	Design Style
1198/4	NO 6 AB	0.61/1.02	16.8	11.2	7.14	5.94	0.56	4.06	Std
1198/6	NO 6 AB	1.22/1.63	16.5	11.2	7.14	5.94	0.56	4.06	Std
0116/5	NO 8 AB	0.71/1.22	16.8	11.2	7.14	7.14	0.61	5.59	Std
0116/6	NO 8 AB	1.42/1.83	16.5	11.2	7.14	7.14	0.61	5.59	Std
0117/5	NO 10 AB	0.71/1.22	19.8	12.7	8.74	7.92	0.71	6.35	Std
0117/7	NO 10 AB	1.42/2.03	19.6	12.7	8.74	7.92	0.71	6.35	Std
0118/6	NO 12 AB	0.91/1.63	25.6	15	11.1	9.52	0.81	9.27	Std
0118/8	NO 12 AB	1.83/2.64	25.4	15	11.1	9.52	0.81	9.27	Std
1761	NO 14 AB	0.91/1.63	26.2	16	12.7	9.91	0.91	7.92	Std
2439	NO 14 AB	0.81/0.91	26.2	16	12.7	9.91	0.91	7.92	Std

These highly effective spring steel 'J' Nuts are lightweight easily installed low cost fasteners. They are used to provide strong thread forms for thin sheets that would otherwise be incapable of accepting a thread. Manufactured to suit a range of sheet thickness in one clip means that one part could be used for several different applications. The design is such that once engaged and tightened the clip creates a spring locking action upon the screw therefore resisting vibration and shock loads. Material: Spring Steel      Finish: Oiled or Trivalent Zinc

**All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples**