




Series: 20102 Type: TR

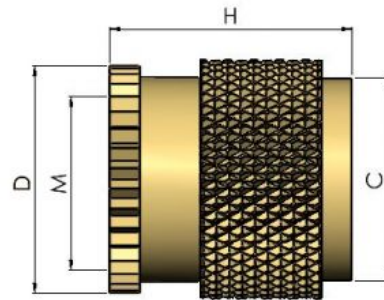

Expansion Insert for Thermoplastic

Part No.	Thread M	Length H	Outer Diam D	Lead Diam C	Hole Diam d-0.1	Hole Depth P	Min Wall E
TR020H040	M2	4.0	4.0	3.4	3.5	5.5	1.8
TR025H040	M2.5	4.0	4.5	3.9	4.0	5.5	2.0
TR025H065	M2.5	6.5	4.5	3.9	4.0	8.0	2.0
TR030H050	M3	5.0	4.5	3.9	4.0	6.5	2.0
TR030H065	M3	6.5	4.5	3.9	4.0	8.0	2.0
TR035H050	M3.5	5.0	5.5	4.9	5.0	6.8	2.5
TR035H080	M3.5	8.0	5.5	4.9	5.0	9.8	2.5
TR040H080	M4	8.0	6.0	4.9	5.5	9.8	2.8
TR040H095	M4	9.5	6.0	4.9	5.5	11.3	2.8
TR050H110	M5	11.0	7.0	5.9	6.5	13.0	3.3
TR050H095	M5	9.5	7.0	5.9	6.5	11.3	3.3
TR080H100	M8	10.0	10.0	9.0	9.5	12.0	4.8
TR060H095	M6	9.5	8.5	7.0	8.0	11.3	4.0
TR060H125	M6	12.5	8.5	7.0	8.0	14.5	4.0
TR100H130	M10	13.0	12.0	11.0	11.5	15.0	5.8

TR Expansion Inserts give excellent performance

All information is given for guidance only and designers should satisfy themselves as to the suitability of the specification by requesting samples